



Knowles High-Performance Digital Voice Vibration Sensor V2S200D


V2S200D PRODUCT OVERVIEW:

- » Specialized sensor to improve voice call quality by rejecting ambient noise
- » Up to 50dB environmental noise suppression outdoors and indoors
- » Higher SNR and bandwidth vs typical sensors for excellent fidelity
- » Size and power optimized for TWS application
- » Ease of integration with PDM interface
- » No specialized handling needed during integration into final product

TYPICAL APPLICATIONS:


- » Self-Speech Pick-up
- » Imposter rejection
- » Noise suppression
- » Fault detection in rotating machines
- » Voice Activity Detection
- » Vibration pick-up for noise cancellation

DIMENSIONS (MM):

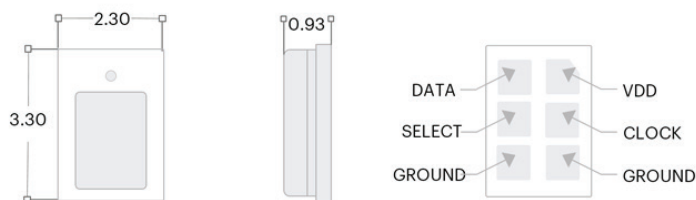

For more information, visit <https://www.knowles.com/V2S>, email us at sales@knowles.com, or contact your nearest Knowles representative.


© 2023, Knowles Electronics, LLC, Itasca, IL USA. All Rights Reserved. Knowles and the logo are trademarks of Knowles Electronics, LLC.

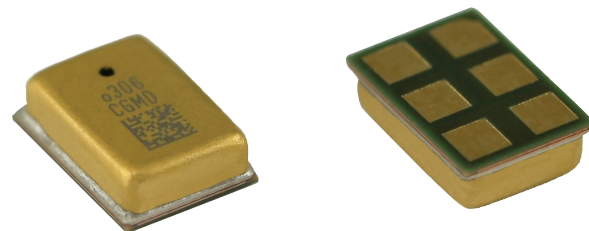

KEY PARAMETERS	SPECIFICATIONS
Signal-to-noise ratio (SNR)	64.5 dB (A)
Bandwidth (± 3 dB)	4 kHz
Current consumption (Low Pwr Mode/ Normal Mode)	290uA / 700uA
Sensitivity and Tolerance	-25 $\pm$ 1.5 dB FS
Supply voltage	1.65 to 3.3V
Interface	PDM Digital
Clock Rates Supported (Low Pwr Mode/ Normal Mode)	600KHz – 950KHz / 1.2MHz - 3.3 MHz
Package dimensions	3.30 x 2.30 x 0.93 mm

APPLICATION NOTES:

Typical stereo mode application circuit

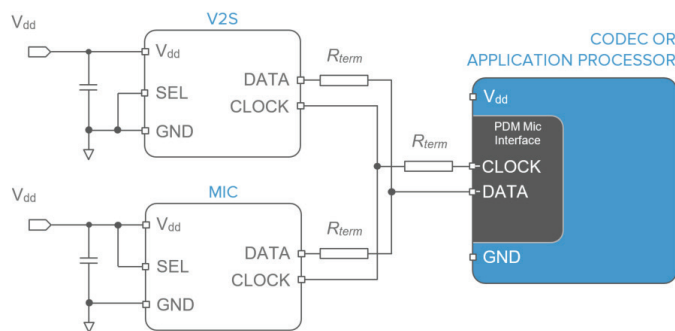

Note: The above block diagram is for illustrative purposes only. Specific connectivity recommendations from the CODEC manufacturer should be followed.